

KUNISEAL AB TAPE

Swellable Waterproofing Tape.
Bentonite & Asphalt Compound.




DESCRIPTION

Kuniseal AB TAPE is a composite product consisting of swellable Bentonite and specially modified Asphalt, which is designed as a water barrier where water has made contact on any of its surfaces. Expansion potential is approximately 2 times. AB TAPE will expand to fill voids where water has penetrated.

Refer to graph Expansion Rate.

SPECIAL FEATURES

- No special adhesive needed.
- Installation time is reduced.
- Long lasting in-situ durability.
- Superior results in stopping moisture penetration.

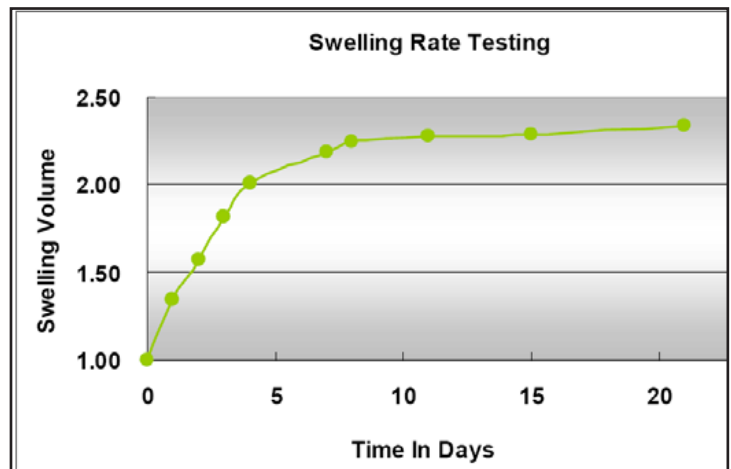

APPLICATION

- Sleeve tubing, piping and ducting.
- H and/or I shaped beams.
- Window and door surrounds.



APPLICATION PROCEDURE

AB TAPE is easy to use and apply. The surface should be clean (dust free) and dry before applying. Place AB TAPE over the joint or around the piping or beam so as to be as near as possible to the centre of the concrete thickness. Do not stretch during placement; wrap at least 2 or 3 layers, for a single layer overlap approx., 50mm to join together.

Cut with knife or scissors at end point.

SIZE AND PACKAGING

AB-TAPE is 50mm wide x 1.5mm thick.
Length 10 metres per rolls.



STORAGE

Store in dry condition, avoid contact with water.


HEALTH AND SAFETY

Refer to MSDS. Gloves should be worn as skin may be irritated with prolonged contact. Wash hands with soap and water after use.

WATERSTOP PERFORMANCE TEST



Installation on Steel and PVC pipe

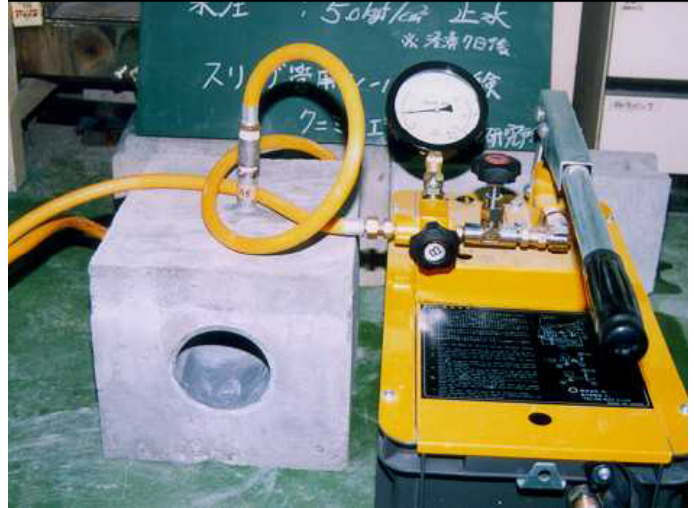

Pressurizing up to 0.5MPa

		0.05Mpa	0.1Mpa	0.2Mpa	0.5Mpa
STEEL PIPE	Blank-No Tape	Leaking			
	AB TAPE	No Leak	No Leak	No Leak	No Leak
PVC PIPE	Blank-No Tape	Leaking			
	AB TAPE	No Leak	No Leak	No Leak	No Leak

WARRANTY

The Seller warrants that at the time of shipment, its products are free from defects in material and workmanship. There is no expressed warranty, the manufacturer, (Kunimine Industries Co., Ltd.) and or their agents, known as (Seller) disclaim any implied warranties including but not limited to the warranty of merchantability and fitness for any particular purpose indicated to Buyer by Seller. Seller's sole obligation under this warranty shall be, upon prompt written notice by the Buyer of any defect or defects, and inspection, if required by the Seller, to replace or at Seller's option to allow a credit for any defective products expressly warranted herein against defects by Seller. Upon purchase of Seller's product(s), it is expressly agreed upon by Buyer that this remedy of replacement or credit, at Seller's option, is Buyer's exclusive remedy under this warranty, in no event shall Seller be liable for consequential loss or damages.

Waterproofing Warehouse
4/12 Strathaird Road, Bundall, 4217
www.wpw.com.au
Phone: +61 07 55921329
Fax: +61 07 55921227



DISTRIBUTED BY:

XYPEX[®]
AUSTRALIA
Concrete Solutions

HEAD OFFICE:

45 Union Rd North Albury,
NSW 2640. Australia
PO Box 255, Lavington,
NSW 2641. Australia
A.B.N. 96 093 161 963

Tel: +61 2 6040 2444

Fax: +61 2 6040 2411

General Inquiries:
xypenq@xypex.com.au

Manufactured by:

Kunimine Industries Co., Ltd.
Tokyo, Japan.