

technical data sheet



FIREBAN ONE

One Part Fire Rated Polyurethane Sealant

PRODUCT

Bostik Fireban One is a one component fire rated polyurethane sealant.

DESCRIPTION

Fireban one is a fire rated, single component, low modulus polyurethane sealant curing via air humidity to form a elastomeric weatherproof fire rated seal.

RECOMMENDED USES

- Sealing joints in expansion and construction joints in precast.
- Sealing joints in insitu concrete, block and brick work.
- Penetration and core hole sealing in conjunction with fire collar or pillows or in areas requiring intumescent sealing
- Sealing acoustic joining

FEATURES & BENEFITS

- High durability
- Excellent weathering resistance
- Can be over painted
- Non staining
- 50% total joint movement minimum
- Australian made
- Excellent acoustic ratings (up to 45 STC)
- Acoustic Joint sealing
- Fire rated up to 4 hours

PERFORMANCE PROPERTIES

Typical properties after 7 days cure at 25°C and 50% RM

Appearance	Non-sag thixotropic paste
Colour	Limestone
Chemical type	Polyurethane
Shore A hardness	30 approx.
Chemical Resistance	Resistant to dilute acids, alkalis and some solvents.
Tack Free Time	6-12 hours
Tensile Strength	>1.3 N/m.m ²
Temperature Resistance	-40°C to + 70°C
Application temperature	+ 5°C to + 35°C
Elongation at Break	>900%

APPROVALS/STANDARDS

- AS 1526-1973
- ASTM C920-1986
- BS4254-1983
- Fire Test Certification to AS1530-4 (1990), AS4072-1 (1992) and BS476-20 (1987)
- Acoustic certification to BCA Standards.
- BOMBA Approved (Malaysia)
- SISIR Approved (Singapore)

PACKAGING

Bostik Fireban One is available in 600ml sausage.

COVERAGE

The coverage below is the approximate linear metre coverage per pack size.(600ml sausage)

SIZE	6mm x 6mm	10mm x 10mm	20mm x 10mm
600ml	16.7	6	3

Calculation formula $\frac{W \times D \times L}{1000} = \text{Litres}$

W = Width(mm) D = Depth(mm) L = Length(metres)

APPLICATION INSTRUCTIONS

Joint Design

Refer to Fire Test Certification in relation to correct depth/width ratio configuration. Back up materials impregnated with oil or bitumen materials are not to be used. Adhesion between the back up material and sealant must not occur because the excessive stresses exerted on the product may cause failure of the sealant.

Preparation:

Clean and dry all surfaces by removing foreign matter and contaminants such as oil, dust, grease, frost, water, dirt, old sealants and any protective coating. Dust and loose particles should be blown out of joints or vacuum cleaned. Non porous surfaces may require preparation / priming, refer primer selection guide. Cleaning solvents should not be allowed to dry or evaporate without being wiped with a clean, dry cloth.

PRIMING

For maximum performance on porous surfaces and in all immersed applications use Bostik N49 Primer. 5077 cleaner / N40 primer is recommended for non-porous surfaces. Prior to any application of Fireban One refer to primer selection guide.


APPLICATION

For application of sausages, a barrel gun is required, clip the end of the sausages and place in barrel gun. Screw end cap and nozzle on to barrel gun. Using the trigger extrude the sealant, to stop depress using the catch plate. Apply Fireban One in a continuous bead using enough pressure to properly fill the joint.

JOINT SEALING HINTS

- Prime prior to the installation of the backing rod
- Always use backing rod for correct sealant geometry
- Ensure maximum adhesion to bond face and depth to width ratio of 1:1 to 12mm and 2:1 from 12– 50mm
- Tool sealant to achieve concave shape

W = between 12 to 50 mm

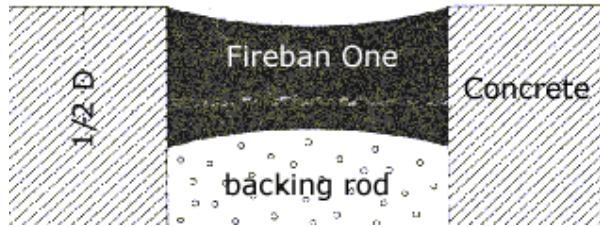

MIXING

No mixing is required for Bostik Fireban One.

PRECAUTION

- Bostik Fireban One sealant should not be applied with wet tooling techniques using solvents, water or detergent/soup solutions is not recommended.
- Bostik Fireban One sealant should not be applied to surfaces with special protective or cosmetic coatings without prior consultation with the manufacturer. Such surfaces include, but are not limited to, mirrors, reflective glass, or surfaces coated with Teflon® polyethylene or polypropylene.
- Bostik Fireban One sealant should not be applied to unpredictable absorptive surfaces such as marble, limestone or granite unless a standard of appearance has been agreed on as a result of testing for stain and/or discolouration.
- Bostik Fireban One sealant cures via air humidity. Bostik Fireban One can be affected by water before or during cure. The sealant should be stored, applied or cured in areas where unusually high humidity or free water are present during the application or initial cure.
- Bostik Fireban One sealant should be allowed to cure for 14 days prior to subjecting to an intermittent or continuous head of water

P.A.T.S (Pretested Adhesion To Substrate) Programme

Bostik offer a service in which a program has been established to eliminate potential field problems by pre-testing Bostik adhesives with samples of building materials to which the adhesive will be applied. This service is available on large projects where pre-application testing will aid in determining the proper surface preparation method to achieve optimum adhesion. Consult a Bostik representative for further information.

HEALTH AND SAFETY

On contact, uncured sealant causes irritation. Gloves and protective goggles must be worn during application and use.

- Avoid contact with skin, eyes and avoid breathing in vapour.
- Wear protective gloves when mixing or using
- If poisoning occurs, contact a doctor or Poisons Information Centre.
- If swallowed, do not induce vomiting. Give a glass of water.
- If skin contact occurs, remove contaminated clothing and wash skin thoroughly for a minimum of 15 minutes and see a doctor.
- For more detailed information refer to Material Safety Data Sheet.

CLEAN-UP

Clean up uncured material and equipment immediately after use using Bostik 9907 solvent. Do not use solvents on skin.

STORAGE

Store between 5°C and 30°C. Shelf life is two years in original unopened sausage.

BOSTIK FIRE BAN ONE

ITEM NO.	STOCK SIZE
224200	600ml (870gm) SAUSAGE LIMESTONE

BOSTIK FIRECAULK

ITEM NO.	STOCK SIZE
239747	BOSTIK FIRECAULK 10L
239755	BOSTIK FIRECAULK L/STONE 960GM
245410	BOSTIK FIRECAULK WHITE 300ML
248770	BOSTIK FIRECAULK WHITE 960GM

BOSTIK N40 PRIMER

ITEM NO.	STOCK SIZE
231436	BOSTIK N40 PRIMER 1L

BOSTIK N49 PRIMER

ITEM NO.	STOCK SIZE
151203	BOSTIK N49 PRIMER 1L
159565	BOSTIK N49 PRIMER 4L

BOSTIK BOND FLEX PRIMER

ITEM NO.	STOCK SIZE
229504	BOSTIK BOND FLEX PRIMER 500ml

BOSTIK 5077 CLEANER

ITEM NO.	STOCK SIZE
227935	BOSTIK 5077 CLEANER 1L

The representations and recommendations regarding the products are based on tests which we believe to be reliable. However, no guarantee of their accuracy can be made because of the great range of field conditions and variations encountered in raw materials, manufacturing equipment and methods. Thus, the products are sold with a limited warranty only, and on the condition that purchasers will make their own tests to determine the suitability of the product for their particular purposes. Under no circumstances will Bostik Findley Australia Pty Ltd be liable to anyone except for replacement of the products or refund of the purchase price.

ALL SALES ARE EXPRESSLY LIMITED TO THE TERMS AND CONDITIONS OF SALE OF BOSTIK FINDLEY AUSTRALIA PTY LTD

FOR FURTHER INFORMATION



BOSTIK FINDLEY AUSTRALIA PTY LTD
 Phone: +61-3-9279 9333
 Fax: +61-3-9279 9240

BOSTIK FINDLEY NZ LIMITED
 Phone: +64-4-567 5119
 Fax: +64-4-567-5412

BOSTIK FINDLEY SINGAPORE PTE LTD
 Phone: +65-863 4088
 Fax: +65-863 4077

BOSTIK FINDLEY (MALAYSIA) SDN BHD
 Phone: +606 764 3246
 Fax: +606 764 3248

SYDNEY
 Phone: 02 8825 3488
 Fax: 02 8825 3411

ADELAIDE
 Phone: 08 8244 0511
 Fax: 08 8244 0522

PERTH
 Phone: 08 9331 7666
 Fax: 08 9331 7677

BRISBANE
 Phone: 07 3265 2377
 Fax: 07 3265 5421

(ABN 79 003 893 838)

Product: Fireban One
 Issue Date: September 2001
 Issue No: 1
 Division: Construction
 Total Pages: 2